

LENZING™ FR, DS-CABCD

LENZING™ for Protective Wear

Lenzing™

Innovative by nature



NFPA 2112-2018, CERTIFIED

CERTIFICATE NUMBER MH61760

FEATURES:

LENZING™ FR blend: fabrics are inherently FR (Fire Retardant).

Composition: LENZING™ FR 49% / M-Aramid 49% / Anti Static 2%

Weight: 4.5oz/ 150gsm.

Fibers: Botanic Origin: LENZING™ is derived from the natural resource wood.

Inherently cellulosic fiber based on Modal technology, Patented technology.

Comfort: LENZING™ for Protective wear pass the comfort test by Hohenstein Institute.

Breathability: LENZING™ allow garments to breathe and cool the users.

LENZING™ FR is best blended with other high-performance fibers to meet end-users high standard safety requirement

Workwear cellulosic fibers contribute to clothing fabrics offering natural comfort in a wide variety of working environments

LENZING™ Offers functional key benefits for Workwear application: Enhanced breathability, Gentle on skin, drape, unfavorable for bacterial growth, smoothness, minimal static charge, fiber strength, performance, thermal regulations.

Colour: Royal Blue

Size: S to 4XL.

Packing:

1pc/bag

25 pcs/carton

Carton Dimension:

57 x 40 x 29cms for size S/M/L/XL

57 x 40 x 31cms for size 2XL/3XL/4XL

Carton Weight:

Gross weight: 19kgs for size L

Net weight: 18kgs for size L

Volume:

CBM(S/M/L/XL): 0.0661

CBM(2XL/3XL/4XL): 0.0706




Sizes	Color	Item Code
S	Royal Blue	E134052201
M	Royal Blue	E134052202
L	Royal Blue	E134052203
XL	Royal Blue	E134052204
2XL	Royal Blue	E134052205
3XL	Royal Blue	E134052206
4XL	Royal Blue	E134052207

LENZING FR, DS-CABCD

LENZING™ for Protective Wear

Lenzing™

Innovative by nature

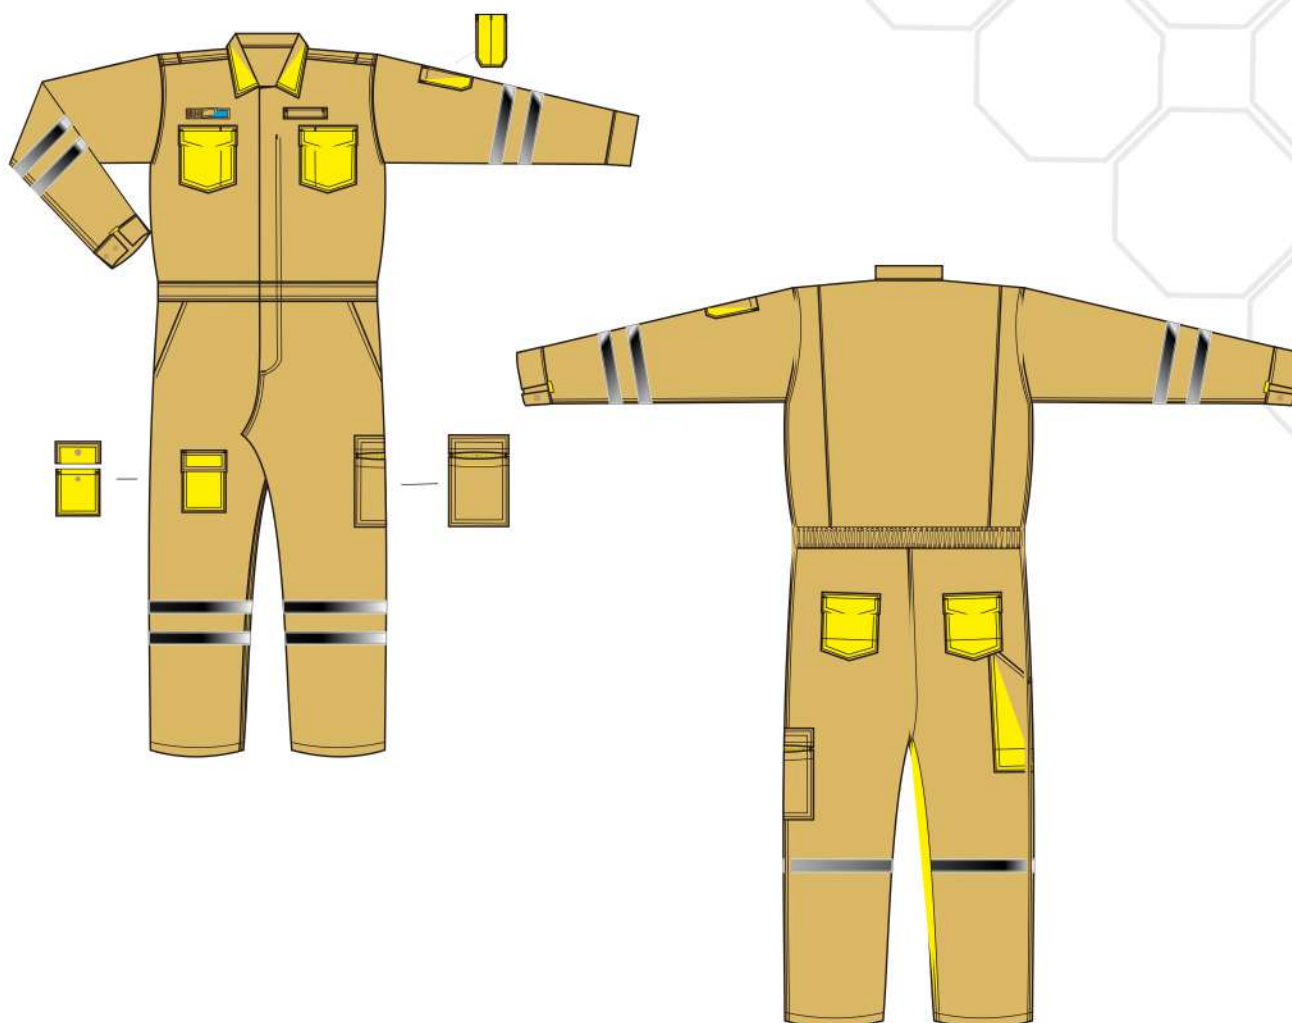

Size Chart:

Unit: Zipper in CM, others in INCH.

		S	M	L	XL	2XL	3XL	4XL	5XL
Zipper		46.5	48	50	52	54	56	58	60
Shoulder	Shoulder seam to seam	18.25	18.5	19	20	20.5	21.5	22.5	23.5
Sleeve length	Shoulder seam to cuffs edge	22.75	23	23.5	24	24.5	25	25.5	27
Chest	At arm hole	20.5	21.5	23	24.5	25.5	27	28.5	30.5
Back length	CBN to waist seam	19	19.5	20	20.5	21	21.5	22	22.8
Cuff	Closed button(round)	5	5.25			5.5			5.75
Arm hole	Around seam	9	9.5	10.5	11	11.75	12.5	13.25	14
Waist		16.5	17	18.5	20	21.5	23	24.5	26
Hip	4" up from crotch	20	22.25	23.75	25.25	26.75	28.25	30.25	32.3
Front rise		11.25	11.5	12	12.5	13	13.5	14	14.5
Back rise		15.75	16	16.5	17	17.5	18	19	20
Thigh	1" down from crotch	13	13.5	14.25	15	15.75	16.5	17.75	19
Knee		9.75	10.25	11	11.5	12	12.5	13	13.5
Inseam		28					29		
Bottom		9.5	10	10	10	10.5	10.5	10.75	11

LENZING FR, DS-CABCD

LENZING™ for Protective Wear 

Lenzing™
Innovative by nature



CERTIFICATE OF COMPLIANCE

Certificate Number MH61760
Report Reference MH61760-202011XX
Issue Date 2020-NOVEMBER-XX

Issued to: XIANNING JIAYUAN CLOTHES-MAKING CO., LTD
BUILDING 1, QUNLI VILLAGE, HENGGOUQIAO HIGH
TECH ZONE, XIAN'AN DISTRICT
XIANNING, HUBEI, 437000
CHINA

This is to certify that
representative samples of Protective Clothing of Industrial Personnel Against Short-
Duration Thermal Exposures from Fire - Garment

See Page 2 of this Certificate for certified products

Have been investigated by UL in accordance with the
component requirements in the Standard(s) indicated on
this Certificate.

Standard(s) for Safety: NFPA 2112, Standard on Flame-Resistant Clothing for
Protection of Industrial Personnel Against Short-Duration
Thermal Exposures from Fire, 2018 Edition

Additional Information: See the UL Online Certifications Directory at
<https://iq.ulprospector.com> for additional information.

This *Certificate of Compliance* does not provide authorization to apply the UL Recognized Component Mark. Only
the UL Follow-Up Services Procedure provides authorization to apply the UL Mark.

Only those products bearing the UL Recognized Component Mark should be considered as being UL Certified
and covered under UL's Follow-Up Services.

Look for the UL Certification Mark on the product.



Bruce Mahrenholz, Director North American Certification Program
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please
contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations>



CERTIFICATE OF COMPLIANCE

Certificate Number MH61760
Report Reference MH61760-202011XX
Issue Date 2020-NOVEMBER-XX

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Certified products:

Type	Model/Style	Closure System
Protective garments:		
Coverall	DS-CABCD	Zipper Front Closure with Snap Fasteners
Jacket	DS-JABCD	Zipper Front Closure with Snap Fasteners
Shirt	DS-SABCD	Snap Fastener Front Closure
Pants	DS-PABCD	Zipper Front Closure with Single Snap Fastener
Winter Jacket	DS-WJABCD	Zipper Front Closure with Snap Fasteners

Note: Model Numbers contain a serial code "ABCD" which is to be replaced with numeric digits that reflect garment production year, FR finish for outer shell fabrics, reflective trims and number of pockets used in construction.

As an example, Coverall Style: DS-C1116

Production Year, Code A is the first "1" (for 2021);

FR Finish for Outer Shell Fabrics, Code B is the second "1" (for Inherent FR);

Reflective Trims, Code C is the third "1" (for with reflective trims);

Number of Pockets, Code D is "6" (for 6-pocket configuration).



Bruce Mahrenholz, Director North American Certification Program

UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>

